



Variety of uses

Locking door

High impact resistance

Weather and UV resistant


The access door on the multi-purpose protective cover is equipped with a lock enabling easy access while providing security from unauthorized persons. The cover utilizes a labyrinth seal for protection against dirt and moisture, and the unit is permanently attached to the enclosure from the inside.



Application examples



Protection for ventilation openings (i.e. pressure compensation)




As a cover for thermostats and regulators




As a tamper-proof cover for electronic input devices



Protection for electronic locks and security system keypads




Protection for power outlets



Cover and protection for data interfaces

Technical Data

Housing	High impact ASA plastic, light grey burning behavior according to UL 94H-B; high resistance to weather and UV light
Operating / Storage temperature	-49 to +158°F (-45 to +70°C)
Dimensions	8.8 x 6.5 x 2.6" (224 x 165 x 65mm)
Protection type	IP20

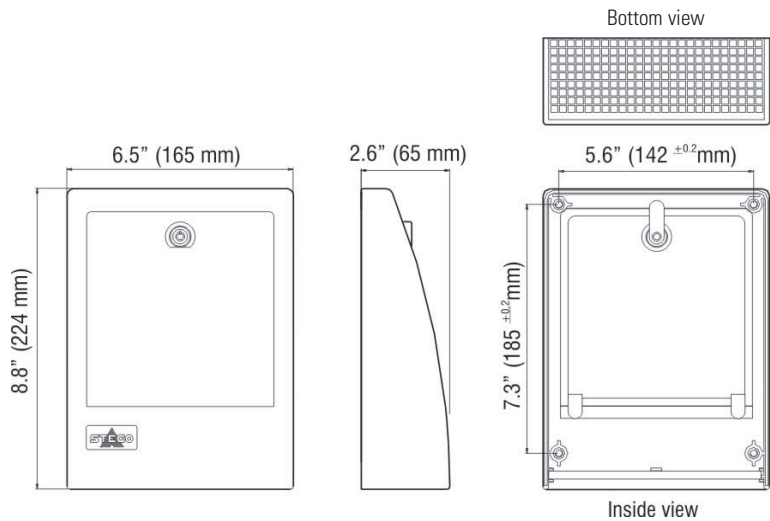

Part No.	Weight
08611.0-00	approx. 0.9 lbs. (0.4kg)

Specifications are subject to change without notice. Suitability of this product for its intended use and any associated risks must be determined by the end customer/ buyer in its final application.